

Instruction Manual

Mini Self-Cleaning Low Maintenance Ioniser

(KS2451M)



Registered at Cardiff No. 2933918
Registered Office: Bondline Electronics, Unit 4,
Rivermead Industrial Estate, Rivermead Drive,
Swindon, Wiltshire, SN5 7EX

Introduction

Thank you for purchasing a Mini Self-Cleaning Low Maintenance Ioniser. Please read this instruction manual in great detail before operating the device. Keep this manual readily accessible for later reference.


Description

The KS2451M Mini Self-Cleaning Low Maintenance Ioniser is compact and small in size, measuring 85 x 45 x 112mm (LxWxH). It can be installed inside of a device for static elimination. The ioniser is safe and reliable with stable performance and has low power consumption with a long service life. It features a button on the back of the ioniser to adjust the wind speed of high, middle and low. The ioniser has a standard tungsten alloy needle which offers longer lifetime compared to titanium and silicon materials. The KS2451M is CE certified ensuring a high-security and high-reliability static eliminator.

| Properties | Value |
|-----------------------|--|
| Input Voltage | DC12V |
| Power | 5.5W |
| Working Voltage | ±DC3000-DC5000V |
| Ion Emission | Steady-state DC |
| Emitter Electrode | Tungsten Alloy |
| Discharge Structure | Uncoupled electrical contact (discharge cylinder) |
| Discharge Range | 450 x 300mm (LxW) |
| Discharge Speed | ≤ 1.5s (150mm away from the air outlet) |
| Ion Balance | -15V ~ +15V (150mm away from the air outlet) |
| Alarm Indicator | The power indicator light on indicates working normally |
| Air Volume | ≤ 48.2CFM |
| Noise | ≤ 38.9db (1m away from the air outlet) |
| Ozone Thickness | ≤ 0.05ppm (150mm away from the air outlet) |
| Working Temperature | 0-50°C |
| Working Humidity | 30-70%RH |
| Dimensions | 85 x 54 x 112mm (LxWxH) (Fan body size) |
| Packaging Accessories | 1 pair of U-shaped aluminium spray powder mounting bracket, 1 pair of bakelite screw handles (M5×10) |
| Shell Material | Aluminum powder spray |
| Power Adapter | INPUT:AC100-240V 50/60Hz; OUTPUT:DC12V 1000mA |
| Net Weight | 350g (Fan body, including mounting bracket and screw handle) |
| Gross Weight | 600g |
| Warranty | 1 Year |
| Certification | CE |


Discharge Effect

| | |
|-------------------------|--|
| Test Standard | ANSI/ESD.STM3.1, SJ/T 11446—2013 |
| Test Instrument | Trek 157 static tester |
| Test Voltage | $\pm 1000V \rightarrow \pm 100V$ attenuation |
| Test Environment | Humidity $50 \pm 5\%$; Temperature $23 \pm 3^\circ C$ |

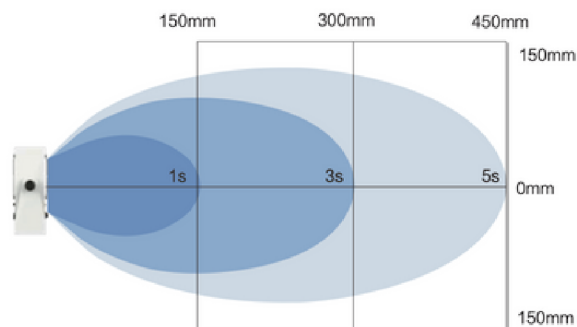


Working Mode

The KS2451M ioniser uses positive and negative synchronous emission electrodes to generate corona discharge through DC high voltage, ionise air molecules, produce a large number of positive and negative polar air ions, and blow them to the surface of the eliminated object by the axial flow fan for electrostatic elimination.

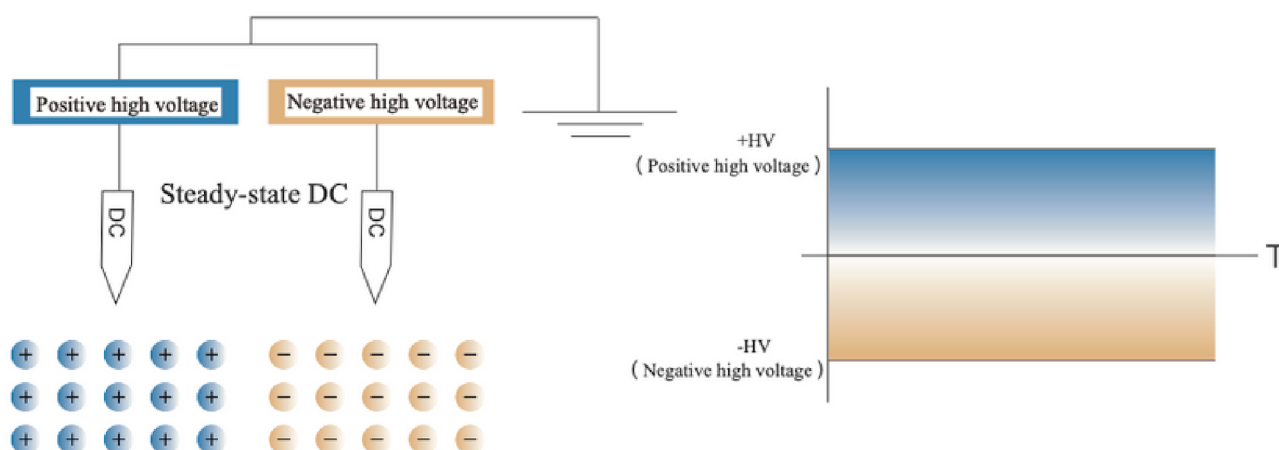


Product Details

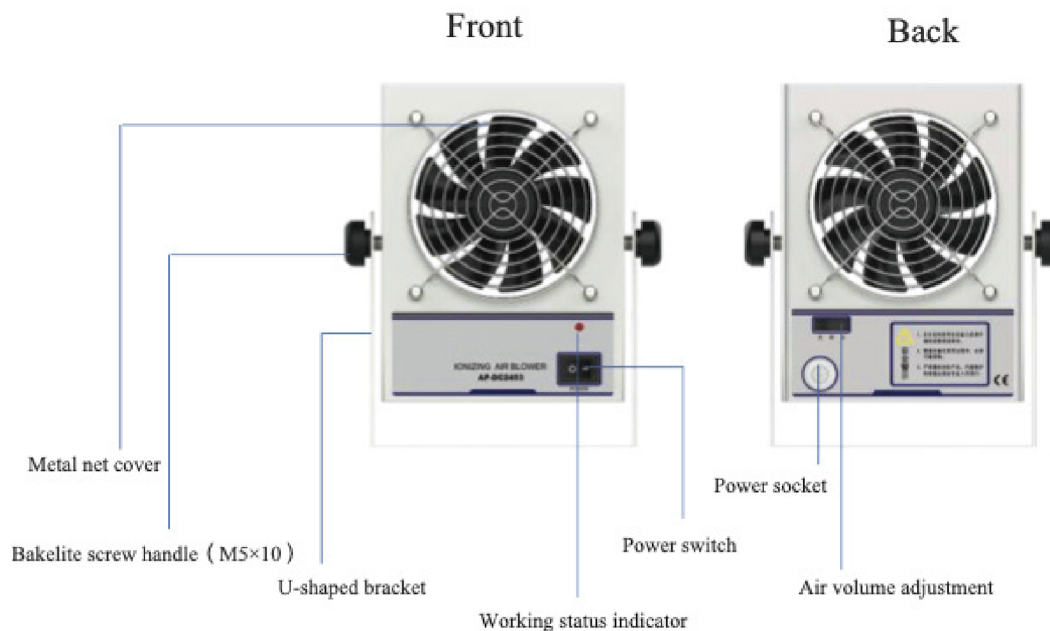


Product Dimensions

Note: The outside drawing may change slightly due to improvement. They should comply with the real device.

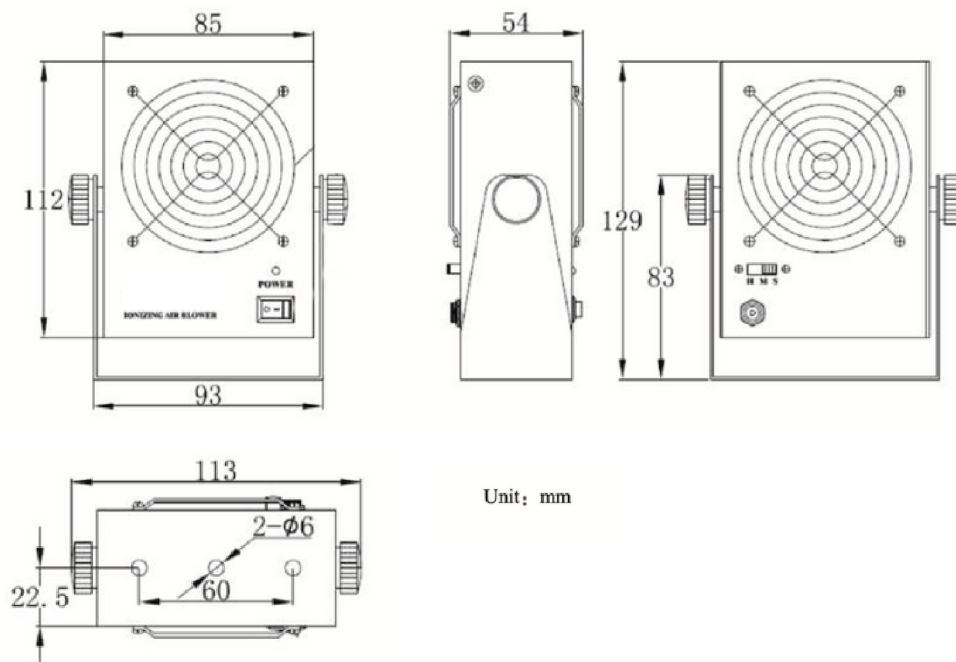


Unit: mm

Steps Of Use

1


Take out the power adapter from the packing box and connect the ionising air blower. Place the ionising air blower close to the working area (about 150~450mm away from the object with electrostatic to be eliminated), and the air outlet of the ionising air blower must be vertically aligned with the object to be eliminated.

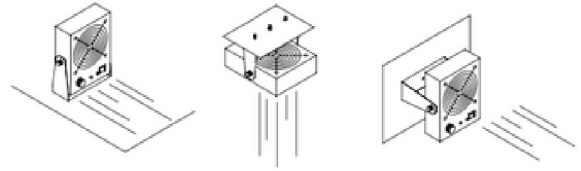2

Use screws or bolts to fix on a firm and flat surface (such as a wall or shelf). The angle of ionising air blower can be adjusted by the knobs on both sides of the bracket to achieve the best static elimination effect.


Installation Position

1. Place the ionising air blower in the working area where static electricity is to be eliminated. And the installation angle should be perpendicular to the surface of the charged body and about 150 to 450 mm away from the static electricity object.

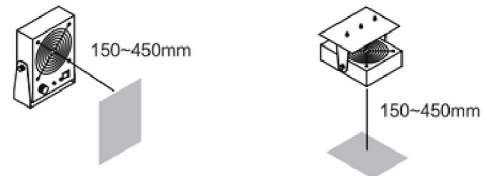


2. Ionising air blower should be at least 300mm away from the metal conductor and metal grounding body.


3. Two ionising air blowers should be installed side by side with an interval of more than 400mm and more than 200mm away from obstacles such as walls.

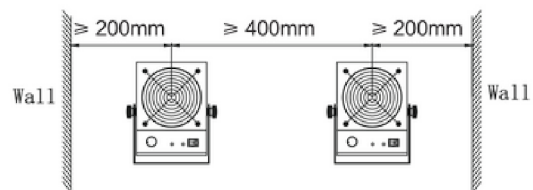

4. The air inlet is at least 150mm away from the wall.



Packing Accessories

| Part Name | Picture | Specification |
|---------------|---|---|
| Power Adapter |  | DSS28-1202000-F 100-240V~1.0A 50/60HZ 12V-2.0A |

Safety Warning

1. Read the operating instruction carefully before installing and using the device.
2. Do not use the device when the humidity is higher than 70%.
3. Do not use the device in inflammable and explosive environment.
4. It is strictly forbidden to disassemble products without authorisation. Internal maintenance and repair must be carried out by professional personnel.
5. The product is strictly prohibited to touch liquid during use, otherwise there will be abnormal, resulting in electric shock or fire.
6. Power must be turned off during inspecting or replacing the product, otherwise it may cause electric shock or fire.
7. The product is specially designed for removing static electricity and is strictly prohibited for other purposes. Any abnormal use may cause machine failure, electric shock, fire and other hidden dangers.
8. It is strictly forbidden to touch the electrode needles when power is on, otherwise it is easy to cause fault and electric shock accident.
9. Discharge needle is a sharp metal object, please use it with care.
10. Please check the specifications of the power supply before powering on the product. Any power supply that does not meet the specifications may cause damage or even failure to the product.
11. Check the power cord regularly. If it is damaged, replace it immediately; otherwise, leakage and abnormal operation may occur.

Trouble Shooting

| No. | Problems | Reasons | Solutions |
|-----|--|--|--|
| 1 | The indicator on the fan panel is off | Poor contact of the power cable Power supply mismatch | Check whether the power cable is in good condition and securely connected Confirm the power supply specification (INPUT:100— 240VAC 50/60Hz; OUTPUT:12VDC 1000mA) |
| 2 | The electrostatic removal performance is obviously reduced | Discharge needle is polluted and damaged Bearing set of ionising air blower is improper | Clean or replace the discharge needle Confirm the best bearing set |
| 3 | The electrostatic removal performance is reduced | There are conductors or other ionising air blowers around | Remove (moving) conductors or other ionising air blowers |
| 4 | Unable to discharge | High voltage module is damaged Main-board chip is damaged | Return to factory for maintenance Return to factory for maintenance |
| 5 | The product is smoky or burnt | The main control board components are burnt out | Return to factory for maintenance |

Maintenance

1) The ionising air blower should be cleaned and maintained in time according to the use environment and the required electrostatic protection requirements in order to ensure the good performance of the product. That is, gently remove the carbon deposits on the discharge electrode and metal net cover with electrostatic brush, dust-free cotton swab, dust-free cloth dipped in anhydrous alcohol.

Note:

A. Operation must be done 10 minutes after power cut off.

B. It must be cleaned when dust or white stuff appear on the tip of the needle during use.

C. The ionising air blower must be powered on after alcohol is completely volatilized after cleaning. No other organic solvent can be used to clean the ionising air blower.

D. The alloy electrode is a consumable product which is not included in the scope of warranty and will be charged for replacement when repairing.

2) Do not press or rotate the control buttons on the fan panel too hard; otherwise, the device will be permanently damaged.

3) If the working indicator light on the front panel of the fan is off or red, it should be stopped and repaired by professional maintenance personnel. It can be used only after the electrical performance index is normal.

After-Sales Service

1) KS2451M Mini Ionising Air Blower has undergone rigorous testing and ageing treatment before ex-work. Its performance has completely reached the relevant indicators marked in the usage instruction.

2) Bondline makes a commitment to the customer that any defective parts inspected by Bondline will be repaired or replaced free of charge within one year from the date of purchase. However, this commitment does not apply to: The device is incorrectly used or installed; Damage caused by negligence or accident during use; Modified, disassembled or repaired by other service departments not authorised by Bondline Electronics Ltd.

3) Bondline shall not be liable for any incorrect use of the products except for repair or replacement of parts as specified above.