



L-Shape Brackets

LSB

Description

"L" Shaped bracket with 3 jack socket (LSBJ) or 3 x 10mm studs (LSBS) are designed to fit under the table, workbench or shelf.

These units distinguish between earth facility and earth bonding point - An earth facility (EF) usually distributes the electrical mains earth or a dedicated ESD earth, (protective earth) within an EPA.

Connection to earth is made via the supplied 2m black wire fitted with a ring terminal. Incorporates 1 meg ohm resistors on each individual stud or socket connection.

Dimensions: 70mm x 22mm x 40mm.


Configurations can include:

4mm, 7mm, 10mm Stud, 4mm Banana Sockets, M5 Binding Post.



Earth bonding points and plugs can be manufactured using any combination of the following:

1) M5 post.	5) Hole blank.
2) 4mm stud.	6) Safety banana socket.
3) 10mm stud.	7) Black banana socket.
4) 7mm stud.	8) Reverse banana socket.

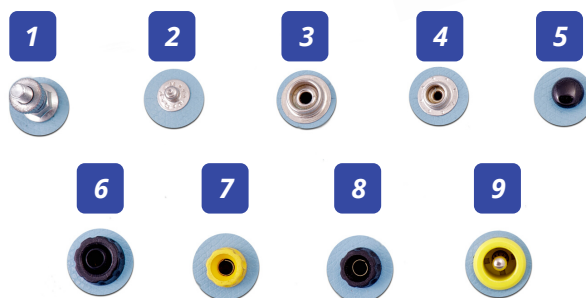

Custom grounding products can be manufactured on request. Special customised printing available on request. Supports EN 61340-5-1 & ESD S20.20 ESD Handling.



Important Notice: The information contained within this spec sheet is for guidance only. We make no warranties expressed or implied and assume no liability regarding any use of this information. L-Shape Brackets, February 24th 2020.