





# **ESD Cardigan Jackets**

## KSCG / KSCNB

#### **Features**

- Available Sizes: Unisex S 2XL
- · With full length zipper
- 2 side pockets
- ESD cuff
- · Comfortable, breathable
- Grey and navy blue colour options

## **Fabric Properties**

- Static dissipative woven fabric (carbon loaded yarns in 5mm grid)
- Finish: Crease resistant, workwear
- Resistance from point to point (Rp): 10^(6) 10^(7) Ohms
- Charging time: <2 seconds
- Complies with IEC/TS 61340-4-9:2016 and ANSI/ESD STM2.1:2018, and keeps this compliance after more than 40 industrial washings
- Developed for industrial washing
- Composition: 48% Polyester, 48% Cotton, 4% Conductive Fibre
- Fabric Weight: 280 g/m<sup>(2)</sup>
- RoHS and REACH compliant.

#### Customisation

- Embroidered or printed company logo or text available upon request
- Individual custom-made ESD Clothing also available



## **Description**

Part of Bondline's ESD winter clothing range, ESD Cardigan Jackets are a great addition for cold manufacturing environments and for wear during the winter months. Unisex style and available in a wide range of sizes.











© Copyright Bondline Electronics Limited. Registered Company Number: 02933918. Registered Company Address: Bondline Electronics Limited, Unit 4 Rivermead Dr, Swindon, Wiltshire, SN5 7EX.







# **ESD Cardigan Jackets**

## KSCG / KSCNB

#### Washing Instructions

Conductive carbon fibres used in ESD fabrics are very sensitive to high temperatures, alkalis, acids, rinses (softeners) and bleaches. Inadequate use may cause damage to carbon fibres and ESD clothing may lose or significantly deteriorate ESD parameters. Therefore, wash ESD clothing very carefully, in each case please follow the instructions:

- 1 In order to preserve the long life of ESD clothings, please use industrial laundries who can provide controlled, documented washing procedures and environment.
- $oldsymbol{1}$ ) Wash in cold or not warmer than 40 °C (104 °F) lukewarm water with neutral liquid detergent.
- 1 Do not use detergents and / or rinse aids that contain bleach and / or chlorine.
- 1 Bleachers are forbidden.
- 1 Do not use rinse aids or detergents with a high alkali or high acid content.
- 1 Do not dry clean.
- 1 Dry in the open air and / or at a temperature up to 50°C (120°F) .
- 1) Does not require ironing, but if absolutely necessary, iron at a maximum temperature of 110°C (230°F) without steaming.
- Wash all items inside out.
- 1 Using deodrant can damage the colour of the product.
- 1) When drying clothes outdoors, do not expose them to direct sunlight.
- 1 Tighten the zippers before each wash.











#### Warranty

- The warranty is strictly valid under controlled and documented industrial laundry conditions, concern the fabric washing cycle as specified in the technical data sheet.
- The warranty is NOT valid if the washing process is made in home environment!
- The warranty covers ESD parameters and possible sewing errors according to IEC 61340-4-9:2016 and ANSI/ESD STM2.1:2018 standard issued only!
- The warranty does not cover the size and shrinkage differences within the tolerances given at the size charts!
- ① Our clothing products are provided with the "Operating instructions with symbols" according to the MSZ EN ISO 3758:2012 standard.
- Thread extension or tearing should not be the basis for a complaint.
- If the product shows improper tampering, the complaint will be rejected.











© Copyright Bondline Electronics Limited. Registered Company Number: 02933918. Registered Company Address: Bondline Electronics Limited,
Unit 4 Rivermead Dr, Swindon, Wiltshire, SN5 7EX.







# **ESD Cardigan Jackets**

# KSCG / KSCNB

Size Chart (CM)	XS	S	М	L	XL	XXL	3XL	4XL	5XL
Chest	108	112	116	120	124	130	136	142	148
Length	64	66	68	70	72	74	76	78	80
Sleeve	72	74	76	78	80	82	84	84	85




Embroidered or printed company logo or text available upon request! Individual custom made ESD Clothing also available!

Size tolerance (Before washing): 2%



#### The size-chart below shows the dimensions before washing.

After washing, it should be calculated with a shrinkage of 8-10% for width (mainly for breast size).

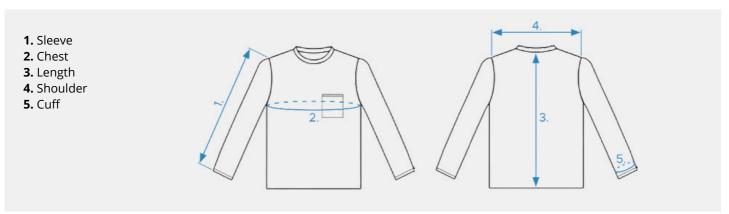











# Eliminate Costly Static Damage...

Whether you are experiencing unacceptable levels of damage in transit, need a specific cleanroom solution or simply don't know which ESD safe equipment is best for you, we can help!

Request complimentary, no obligation advice by speaking with one of our technical experts today.





